

Superline™ Refleкто™ MR16



Aluminized Halogen Reflector Lamps

Superline™ Refleкто™ series of Halogen MR16 lamps provide professional accent lighting through evenly distributed light. The multi-lense geometry of the reflector surface in conjunction with an axial, computer-aligned filament, uniformly illuminates any surface. There is no ring-shaped shadow and no black spot in the middle of the light pattern.

The Superline Refleкто combines an aluminum deposition and a high temperature colored coating on the reflector to prevent any back-spill of light and to reduce heat to the back of the lamp. The aluminized coating redirects heat through the front of the lamp, thus diminishing the risk of thermal damage to sockets, transformers, and ceilings. The Superline Refleкто is offered in four designer colors of matte black, silver, bronze and chrome - ideal for low voltage cable and track lighting.

Available in 20W, 35W, and 50W; in Flood and Narrow Flood beam spreads.



Dimmable


FEATURES & BENEFITS

- No Light Diffusion from Back-Spill
- Reduced Heat to Socket, Fixture and Transformers
- 80% Reduction of IR to the Back of the Lamp
- Decorative Aluminum Coating in Matte Colors Black, Silver, Bronze and Chrome
- Axial Filament for Precise Beam Control
- Dimmable
- Crisp White Halogen Light
- UV-Cut Halogen Capsule


APPLICATIONS

- Accent Lighting
- Restaurants
- Museums and Galleries
- Shop Windows, Displays
- Track and Cable Lighting

Superline™ - Multi-Lense Reflector



Reflector Surface:
Optimized reflector design with hexagonal - shaped lenses



Reflector Cross Section:
The hexagonal-shaped lenses provide total uniformity of light distribution




Superline™ Refleкто™ lamps are manufactured under ISO 9001 guidelines ensuring quality and security for the purchaser.

SPECIFICATIONS


Decorative Silver, Black, Bronze & Chrome Coating Stops Backspill of Any Light

The aluminum coating of the reflector ensures lower heat radiation to the rear of the lamp.



Lamp Socket

The model C-33U socket is rated up to 24V-7A for use with all low voltage USHIO GU5.3 based MR16 lamps. The metal clips secure the lamp firmly into the socket. Use Ordering Code 1002142.




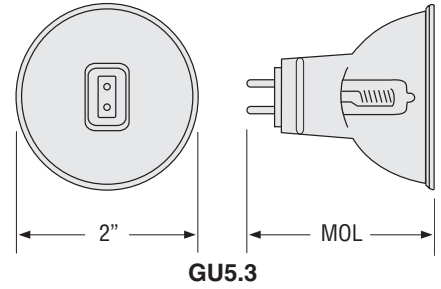


Case Quantity: 50


Watts (W)	Ordering Code	Lamp Description	Voltage (V)	Dimension MOL (in)	Color Temp (K)	Beam Angle	Beam Spread	Luminous Intensity (cd)	Reflector Color Coating	Average Rated Life (h)
SUPERLINE™ REFLEKTO™ MR16 Aluminized Colored Back, 2-Pin Base										
20	1000018	BAB/S	12	1.77	2900	36°	Flood	510	Silver	3500
20	1000019	BAB/S/FG	12	1.78	2900	36°	Flood	510	Silver	3500
35	1000567	FMW/B	12	1.77	2950	36°	Flood	1200	Black	3500
35	1000568	FMW/B/FG	12	1.78	2950	36°	Flood	1200	Black	3500
35	1000575	FMW/S	12	1.77	2950	36°	Flood	1200	Silver	3500
35	1000576	FMW/S/FG	12	1.78	2950	36°	Flood	1200	Silver	3500
50	1003542	EXZ/BZ/FG	12	1.78	3000	24°	Narrow Flood	3000	Bronze	3500
50	1001653	EXZ/S	12	1.77	3000	24°	Narrow Flood	3000	Silver	3500
50	1000439	EXZ/S/FG	12	1.78	3000	24°	Narrow Flood	3000	Silver	3500
50	1000399	EXN/B	12	1.77	3000	36°	Flood	1580	Black	3500
50	1000400	EXN/B/FG	12	1.78	3000	36°	Flood	1580	Black	3500
50	1003819	EXN/CH/FG	12	1.77	3000	36°	Flood	1580	Chrome	3500
50	1000407	EXN/S	12	1.77	3000	36°	Flood	1580	Silver	3500
50	1000408	EXN/S/FG	12	1.78	3000	36°	Flood	1580	Silver	3500

Discontinued - For Reference Only


All dimensions shown in inches unless otherwise noted. Not compliant with California Title 20.



Standard Multi-Mirror Reflectors

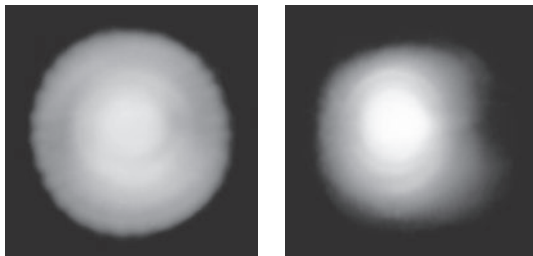

Superline - Multi-Lense Reflector

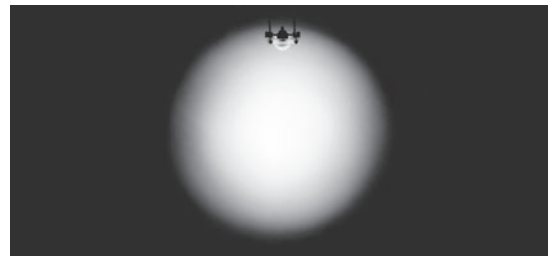

The geometry of the Multi-lense reflector together with an axial filament design, guarantees an absolute uniform appearance across the beam without unsightly shadows, dark spots or rings. (All photos: 20W, flood distribution, taken 1 meter from screen).

